


60.0173

TŁUMIK HAŁASU

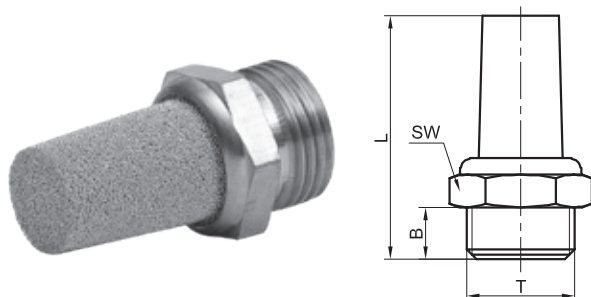


T	B	L	SW	Nr zamówieniowy
M5	5	20	8	60.0173.05
G1/8	6	24	12	60.0173.18
G1/4	7	27	15	60.0173.14
G3/8	9	36	18	60.0173.38
G1/2	10	40	21	60.0173.12
G3/4	11	51	27	60.0173.34

Wykonanie materiałowe: mosiądz

80.0174

TŁUMIK HAŁASU

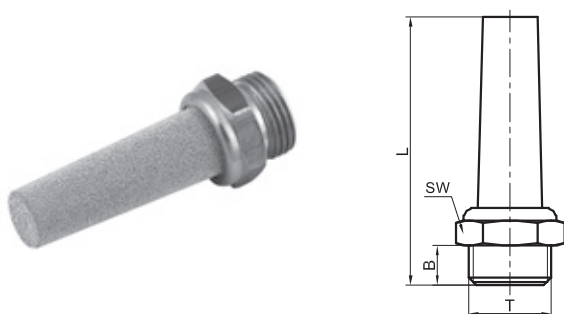


T	B	L	SW	Nr zamówieniowy
G1/8	6	44	13	80.0174.18
G1/4	7	50	16	80.0174.14
G3/8	8	54	19	80.0174.38
G1/2	9	67	24	80.0174.12
G3/4	9	65	30	80.0174.34
G1	12	67	36	80.0174.100

Wykonanie materiałowe: mosiądz

80.0174K

TŁUMIK HAŁASU

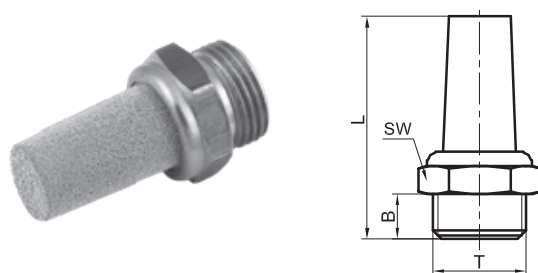


T	B	L	SW	Nr zamówieniowy
M5	4	17	8	80.0174.M5K
G1/8	6	29	13	80.0174.18K
G1/4	7	32	16	80.0174.14K
G3/8	8	40	19	80.0174.38K
G1/2	9	45	24	80.0174.12K
G3/4	10	56	30	80.0174.34K

Wykonanie materiałowe: mosiądz

80.0175

TŁUMIK HAŁASU Z REGULOWANYM WYPŁYWEM

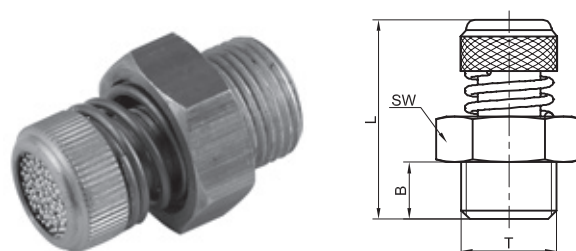

T	B	Lmin	Lmax	SW	Nr zamówieniowy
G1/8	6	26	28	13	80.0175.18
G1/4	8	28	31	15	80.0175.14
G3/8	10	32	35	22	80.0175.38
G1/2	10	32	35	22	80.0175.12

Wykonanie materiałowe: mosiądz