




JARZMO - DO SERII SCN

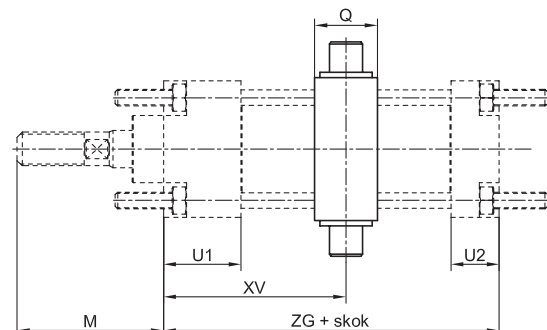




Wymiary [mm]												Numer zamówieniowy
AE	M	ØTD	TG	TL	TM	Q	U1	U2	ZG	XV		
										min.	max.*	
46	45	12	32,5	12	50	15	22	17	80	34	52	10.004E.05.
59	70	16	38	16	63	20	40	23	110	60	70	10.004F.05.
69	70	16	46,5	16	75	20	37	23	110	60	70	10.004G.05.
84	85	20	56,5	20	90	25	43	27	125	64,5	79,5	10.004H.05.
102	85	20	72	20	110	25	37	27	125	64,5	79,5	10.004J.05.
125	110	25	90	25	132	30	51	32	145	74	91	10.004K.05.
155	110	25	110	25	160	32	51	32	145	74	91	10.004L.05.
190	135	32	140	32	200	40	57	43	180	91	110	10.004M.05.
240	135	32	175	32	250	40	57	43	180	91	110	10.004N.05.

Uwaga: w przypadku zamówienia jarzma zamontowanego na siłowniku, należy podać wymiar XV.

Wykonanie materiałowe - stal węglowa

Możliwe wykonanie kwasoodporne.

JARZMO - DO SERII SSI, SPT

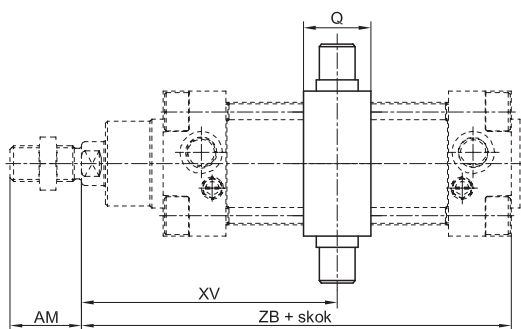

Wymiary											Numer zamówieniowy
AE	AM	ØTD e9	TG	TL	TM	Q	UW	XV		ZB	
								min.	max.*		
46	22	12	32,5	12	50	15	46	67	79	120	10.014E.05
52	24	16	38	16	63	20	59	74	91	135	10.014F.05
65	32	16	46,5	16	75	20	69	82	98	143	10.014G.05
75	32	20	56,5	20	90	25	84	87	108	158	10.014H.05
95	40	20	72	20	110	25	102	99	121	174	10.014J.05
113	40	25	89	25	132	30	125	109	132	189	10.014K.05
140	54	25	110	25	160	32	155	145	160	225	10.014L.05
180	72	32	140	32	200	40	190	158	171	260	10.014M.05
220	72	32	175	32	250	40	240	170	181	275	10.014N.05
314	84	40	220	40	320	50	296	192	217	305	10.014P.05

Uwaga: w przypadku zamówienia jarzma zamontowanego na siłowniku, należy podać wymiar XV.

Wykonanie materiałowe - żeliwo.

Możliwe wykonanie kwasoodporne.

*Wymiar XV_{max} określony dla skoku 0 mm. Do wymiaru XV należy doliczyć skok siłownika.