
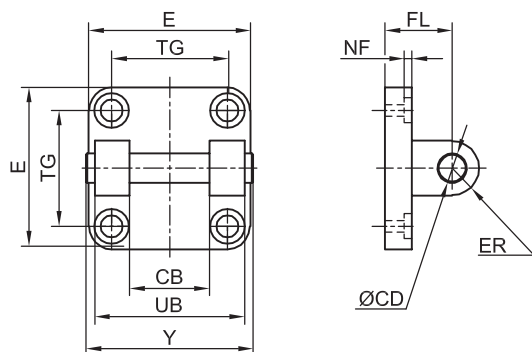


WIDEŁKI MP - 2 - DO SERII STK, SSI, SPT, STE, SKP


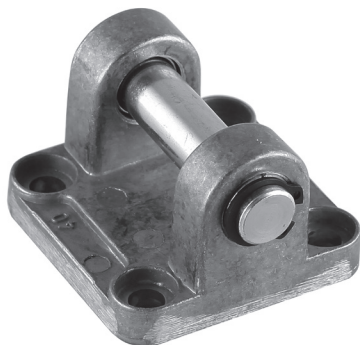


Uwaga: do siłowników D125+D200 dostępne są widełki ze stali węglowej.

Możliwe wykonanie kwasoodporne.

Wymiary [mm]									Wykonanie materiałowe	Numer zamówieniowy
CB	ØCD H9	E	ER	FL	NF	TG	UB	Y		
26	10	45	10	22	3,5	32,5	45	52	żeliwo	10.014E.02.
26	10	45	10	22	3,5	32,5	45	52	stop aluminium	10.014E.02.A
28	12	52	12	25	3,5	38	52	59	żeliwo	10.014F.02.
28	12	52	12	25	3,5	38	52	59	stop aluminium	10.014F.02.A
32	12	65	12	27	4,5	46,5	60	67	żeliwo	10.014G.02.
32	12	65	12	27	4,5	46,5	60	67	stop aluminium	10.014G.02.A
40	16	75	16	32	4,5	56,5	70	77,5	żeliwo	10.014H.02.
40	16	75	16	32	4,5	56,5	70	77,5	stop aluminium	10.014H.02.A
50	16	95	16	36	4	72	90	97,5	żeliwo	10.014J.02.
50	16	95	16	36	4	72	90	97,5	stop aluminium	10.014J.02.A
60	20	115	20	41	4	89	110	118	żeliwo	10.014K.02.
60	20	115	20	41	4	89	110	118	stop aluminium	10.014K.02.A
70	25	140	25	50	10	110	130	142	żeliwo	10.014L.02.
70	25	140	25	50	10	110	130	142	stop aluminium	10.014L.02.A
90	25	180	25	55	10	140	170	182	żeliwo	10.014M.02.
90	25	180	25	55	10	140	170	182	stop aluminium	10.014M.02.A
90	25	220	25	60	14	175	170	182	żeliwo	10.014N.02.
90	25	220	25	60	14	175	170	182	stop aluminium	10.014N.02.A
110	40	270	40	70	13,5	220	200	215	żeliwo	10.014P.02.
110	40	270	40	70	13,5	220	200	215	stop aluminium	10.014P.02.A
120	45	350	45	80	15	270	220	235	stop aluminium	10.014R.02.A

WIDEŁKI DO SWORZNIA Z ZABEZPIECZENIEM PRZED OBROTEM - DO SERII STK, SSI, STE

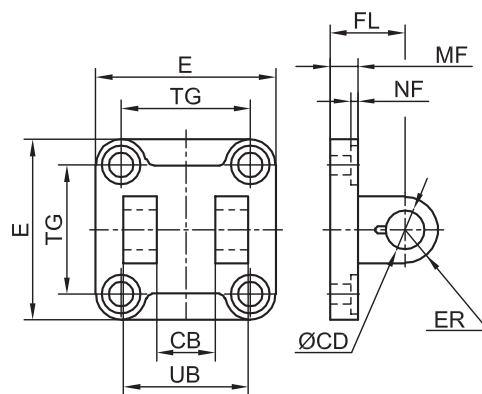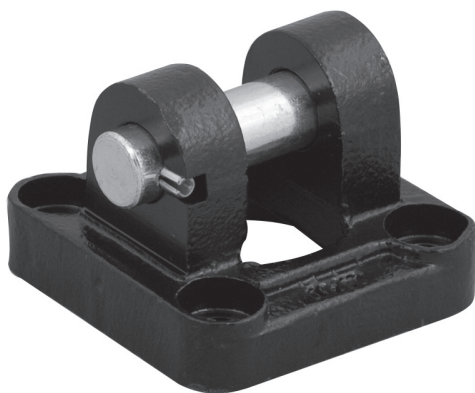

Wymiary [mm]									Numer zamówieniowy
CB H14	ØCD H9	E	FL	MF	NF	ER	TG	UB	
14	10	45	22	10	4,5	10	32,5	34	10.014E.23.
16	12	52	25	10	4,5	12	38	40	10.014F.23.
21	16	65	27	10	3,5	12	46,5	45	10.014G.23.
21	16	75	32	12	4,5	15	56,5	51	10.014H.23.
25	20	95	36	14	4	16	72	65	10.014J.23.
25	20	115	41	16	6	20	89	75	10.014K.23.
37	30	140	50	20	10	25	110	97	10.014L.23.

Uwaga: wykonanie materiałowe - stal węglowa