


84.0050.01

PRZYŁĄCZKA PROSTA WTYKOWA

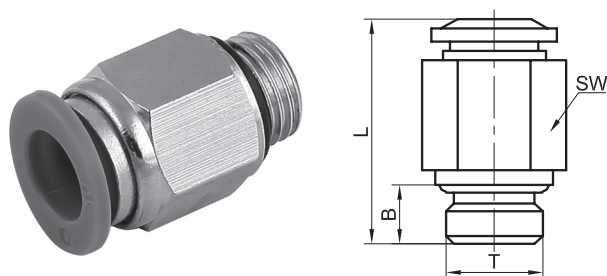


T	PRZEWÓD ØDz	B	L	SW	Nr zamówieniowy
M5	4	4	19	10	84.0050.01.0504
M5	6	4	21	12	84.0050.01.0506
G1/8	4	5	19	14	84.0050.01.1804
G1/8	6	5	20	14	84.0050.01.1806
G1/8	8	5	26	14	84.0050.01.1808
G1/8	10	5	27	17	84.0050.01.1810
G1/4	4	7	18	17	84.0050.01.1404
G1/4	6	7	22	17	84.0050.01.1406
G1/4	8	7	24	17	84.0050.01.1408
G1/4	10	7	30	17	84.0050.01.1410
G1/4	12	7	32	21	84.0050.01.1412
G3/8	6	8	21	20	84.0050.01.3806
G3/8	8	8	21	20	84.0050.01.3808
G3/8	10	8	27	20	84.0050.01.3810
G3/8	12	8	30	21	84.0050.01.3812
G3/8	14	7	32	24	84.0050.01.3814
G3/8	16	7	34	24	84.0050.01.3816
G1/2	6	11	25	24	84.0050.01.1206
G1/2	8	11	26	24	84.0050.01.1208
G1/2	10	11	25	24	84.0050.01.1210
G1/2	12	11	32	24	84.0050.01.1212
G1/2	14	9	30	24	84.0050.01.1214
G1/2	16	11	38	24	84.0050.01.1216

Wykonanie materiałowe: stal

84.0050.04

PRZYŁĄCZKA KĄTOWA WTYKOWA OBROTOWA

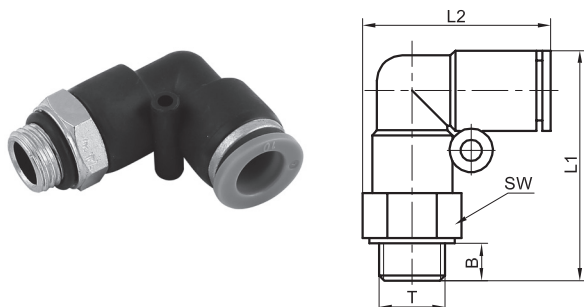


T	PRZEWÓD ØDz	B	L1	L2	SW	Nr zamówieniowy
M5	4	4	22	23	8	84.0050.04.0504
M5	6	4	23	24	8	84.0050.04.0506
G1/8	4	5	25	30	14	84.0050.04.1804
G1/8	6	5	26	32	14	84.0050.04.1806
G1/8	8	5	30	36	14	84.0050.04.1808
G1/8	10	5	36	43	14	84.0050.04.1810
G1/4	4	7	26	32	17	84.0050.04.1404
G1/4	6	7	28	35	17	84.0050.04.1406
G1/4	8	7	32	39	17	84.0050.04.1408
G1/4	10	7	36	45	17	84.0050.04.1410
G1/4	12	7	42	48	21	84.0050.04.1412
G3/8	6	8	30	37	20	84.0050.04.3806
G3/8	8	8	34	40	20	84.0050.04.3808
G3/8	10	8	40	46	20	84.0050.04.3810
G3/8	12	8	41	50	21	84.0050.04.3812
G3/8	14	7	42	51	24	84.0050.04.3814
G3/8	16	7	46	55	24	84.0050.04.3816
G1/2	6	11	32	40	24	84.0050.04.1206
G1/2	8	11	36	44	24	84.0050.04.1208
G1/2	10	11	41	50	24	84.0050.04.1210
G1/2	12	11	42	53	24	84.0050.04.1212
G1/2	14	9	44	52	24	84.0050.04.1214
G1/2	16	11	45	58	24	84.0050.04.1215

Wykonanie materiałowe: nylon i poliuretan

84.0050.08

ŁĄCZNIK GRODZIOWY WTYKOWY

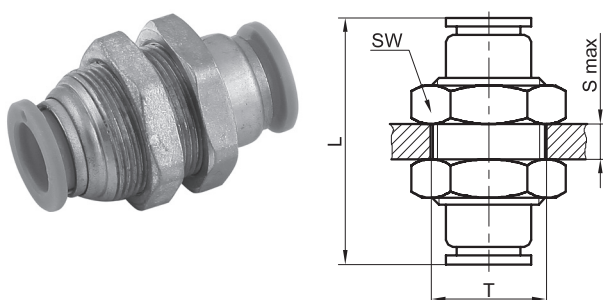

T	PRZEWÓD ØDz	Smax.	L	SW	Nr zamówieniowy
M12	4	9,7	30	14	84.0050.08.04
M14	6	7,5	32	17	84.0050.08.06
M16	8	6,8	35	19	84.0050.08.08
M20	10	11,5	39	24	84.0050.08.10
M22	12	12,8	45	27	84.0050.08.12
M24	14	19	45	27	84.0050.08.14
M26	16	21,6	47	30	84.0050.08.16

Wykonanie materiałowe: stal