

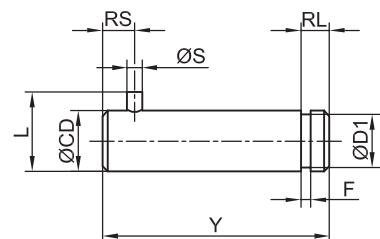


SWORZEŃ Z ZABEZPIECZENIEM PRZED OBROTEM DO WIDEŁEK I UCH Z PRZEGUBEM KULOWYM



Wymiary [mm]								Numer zamówieniowy
ØS h12	RS	ØCD f7	ØD1	F H13	RL	Y	L	
3	4,5	10	9,6	1,1	4	41	14	10.014E.26.
4	6	12	11,5	1,1	4	48	16	10.014F.26.
4	6	16	15,2	1,1	5	54	20	10.014G.26.
4	6	16	15,2	1,1	5	60	20	10.014H.26.
4	6	20	19	1,3	6	75	24	10.014J.26.
4	6	20	19	1,3	6	85	24	10.014K.26.
6	9	30	28,6	1,6	7	110	36	10.014L.26.


UCHO ZE SWORZNIEM - DO SERII STD

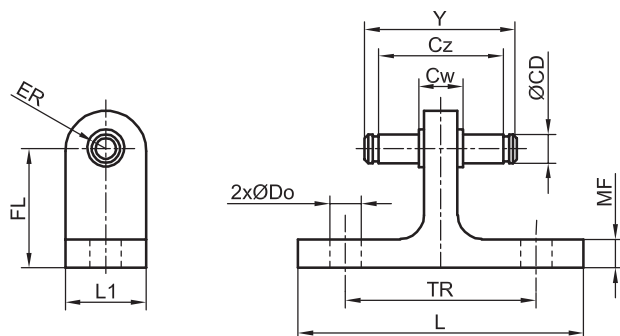

Wymiary [mm]											Numer zamówieniowy
ØCD	CW	CZ	ØDo	ER	FL	L	L1	MF	TR	Y	
6	8	27	6,6	10	25	60	17	5	40	32,5	10.011E.01.

Możliwe wykonanie kwasoodporne.

UCHO ZE SWORZNIEM - DO SERII SMI

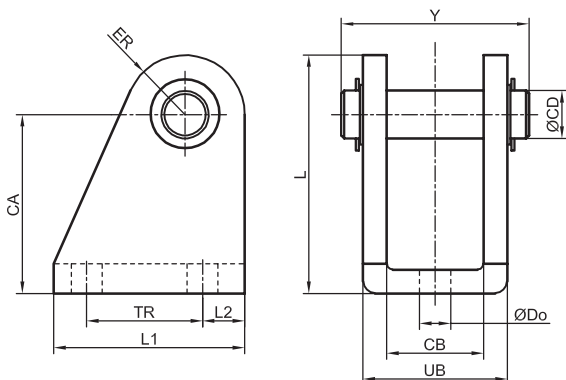

Wymiary [mm]											Numer zamówieniowy
ØDo H13	CA	CB	ØCD H11	ER	L	L1	L2	TR	UB	Y	
5,5	20	12,2	6	7	27	25	4,5	16	18,2	24,5	10.007A.01.
	27				34						10.007A.01.01
6,6	25	16,2	8	10	35	32	6	20	24,2	30,5	10.007C.01.
	30				40						10.007C.01.01

Uwaga: wykonanie materiałowe - stal węglowa
Możliwe wykonanie kwasoodporne.