



UCHO PROSTE KOMPLETNE - DO SERII SCN

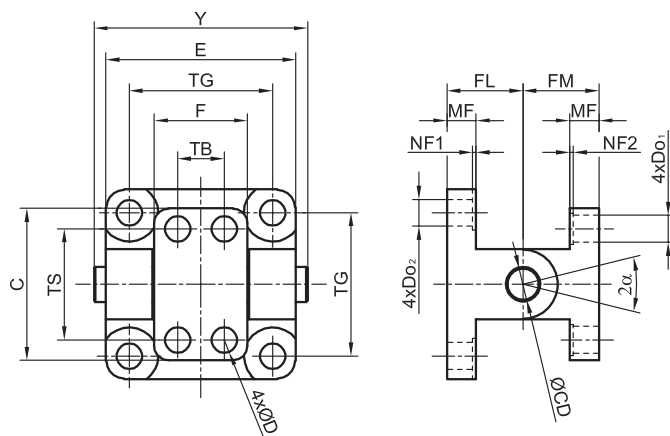

Wymiary [mm]																Wykonanie mate- rialowe	Numer zamówieniowy
ØCD	C	ØDo1	ØDo2	E	F	FL	FM	MF	NF 1	NF 2	TG	TS	TB	Y	α°		
12	52	10	7	52	32	24	26	10	1,4	6	40	38	16	60	50	żeliwo	10.004F.01.
12	52	10	7	52	32	24	26	10	4,5	6	40	38	16	60	50	stop aluminium	10.004F.01.A
12	52	10	9	65	32	26	26	10	1,2	8	49	38	16	73	60	żeliwo	10.004G.01.
12	52	10	9	65	32	26	26	10	4,5	8	49	38	16	73	60	stop aluminium	10.004G.01.A
16	76	12	9	75	46	30	34	12	3,6	8	59	54	25	83	60	żeliwo	10.004H.01.
16	76	12	9	75	46	30	34	12	4,5	8	59	54	25	83	60	stop aluminium	10.004H.01.A
16	76	12	11	95	46	32	34	12	1	10	75	54	25	103	60	żeliwo	10.004J.01.
16	76	12	11	95	46	32	34	12	4,5	10	75	54	25	103	60	stop aluminium	10.004J.01.A
20	115	16	11	115	56	37	41	16	1,2	10	90	90	32	123	60	żeliwo	10.004K.01.
20	115	16	11	115	56	37	41	16	4,5	10	90	90	32	123	60	stop aluminium	10.004K.01.A
20	115	16	11	140	56	41	41	16	1,4	12	110	90	32	148	60	żeliwo	10.004L.01.
20	115	16	11	140	56	41	41	16	10	12	110	90	32	148	60	stop aluminium	10.004L.01.A
25	180	20	18	180	71	55	55	20	1,4	16	140	150	43	188	60	żeliwo	10.004M.01.
25	180	20	18	180	71	55	55	20	10,5	16	140	150	43	188	60	stop aluminium	10.004M.01.A
25	180	20	18	220	71	55	55	20	1,6	16	175	150	43	228	60	żeliwo	10.004N.01.
25	180	20	18	220	71	55	55	20	14	16	175	150	43	228	60	stop aluminium	10.004N.01.A

UCHO PROSTE Z PRZEGUBEM KULOWYM - DO SERII STK, SSI, SPT, STE

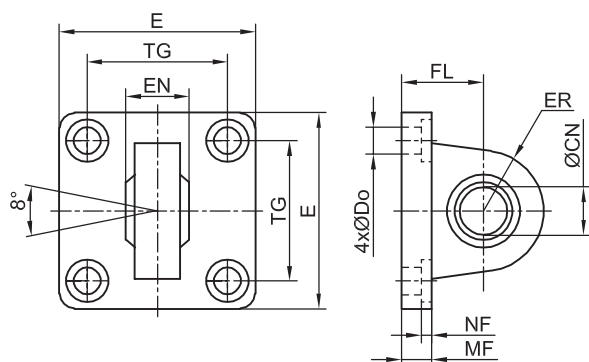

Wymiary [mm]									Numer zamówieniowy
øCN H7	øDo	E	EN	ER	FL	MF	NF	TG	
10	6,6	45	14	15	22	10	4,5	32,5	10.014E.16.
12	6,6	55	16	18	25	10	4,5	38	10.014F.16.
16	9	65	21	20	27	10	3,5	46,5	10.014G.16.
16	9	75	21	23	32	12	5,5	56,5	10.014H.16.
20	11	95	25	27	36	14	4	72	10.014J.16.
20	11	115	25	30	41	16	6	89	10.014K.16.
30	13,5	140	37	40	50	20	10	110	10.014L.16.

Uwaga: wykonanie materiałowe: ucho - żeliwo, łożysko - stal stopowa.

Uwaga: stosować z widelkami 10.014X.23 (str. 1.17.01.20)