


CYLINDRY HYDRAULICZNE

Ucho PR..N

Ze smarownicą; łączenie stal, stal kuta C45



Ucho PR..N

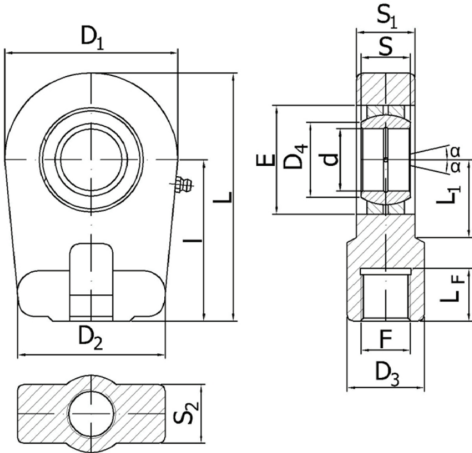

Wymiary [mm]													Nr zamówieniowy
d	l	S	LF	D1	D2	D3	D4	S1	S2	L	L1	F	
20	50	16	17	56	46	25	24,1	19	21	80	25	M 16x1,5	75.PR20N
25	50	20	17	56	46	25	29,3	23	21	80	28	M 16x1,5	75.PR25N
30	60	22	23	64	50	32	34,2	28	26	94	30	M 22x1,5	75.PR30N
35	70	25	29	78	66	40	39,7	30	28	112	38	M 28x1,5	75.PR35N
40	85	28	36	94	76	49	45	35	33	135	45	M 35x1,5	75.PR40N
50	105	35	46	116	90	61	56	40	37	168	55	M 45x1,5	75.PR50N
60	130	44	59	130	120	75	66,8	50	46	200	65	M 58x1,5	75.PR60N
70	150	49	66	157	130	86	77,8	55	51	232	75	M 65x1,5	75.PR70N
80	170	55	81	178	160	105	98,4	60	55	265	80	M 80x2	75.PR80N
90	210	60	101	210	180	124	98,1	65	63	323	90	M 100x2	75.PR90N
100	235	70	111	234	200	138	109,5	70	65	360,7	105	M 110x2	75.PR100N
110	265	70	125	270	220	152	121,2	80	76	408,2	115	M 120x3	75.PR110N
120	310	85	135	342	300	172	135,5	90	87	490	140	M 130x3	75.PR120N
120	310	80	135	300	230	165	135	90	80	460	140	M 130x3	75.PR120N.2(1)

(1) Żeliwo sferoidalne / spheroid cast iron